



ADP2400FXSBRPTM

ADP Flextron Plus



ATLC's *FLEXTRON™ Plus* portables antennas offer:


- Monopole and dipole designs
- Excellent mechanical integrity and electrical performance
- Ruggedized construction for field durability
- Quick delivery from time of order
- Custom frequencies available
- Made in USA - Quick Delivery
- Spring Base and / or Fiberglass radome

Electrical Properties:	
Frequency Range	2300-2500 mhz
Impedance	50 ohm nominal
VSWR	<2.0:1
Gain	2 dBi
Polarization	Vertical


Mechanical Properties:	
Connector Style	TNC M
Material	Brass, Polyolefin Adhesive Lined
Operation Temp.	-20c to +65c
Storage Temp.	-30c to +75c

<p>ADP2400FXSBRPTM ADP – ATLC Dipole Omni 2400 – 2300-2500 Mhz FX – Fixed Connector SB – Spring Base RPTM – Reverse Polarity TNC M</p>

ELEV 1 -LONG DIMENSION-ADC MOUNTED ON CORNER OF HAND HELD UNIT

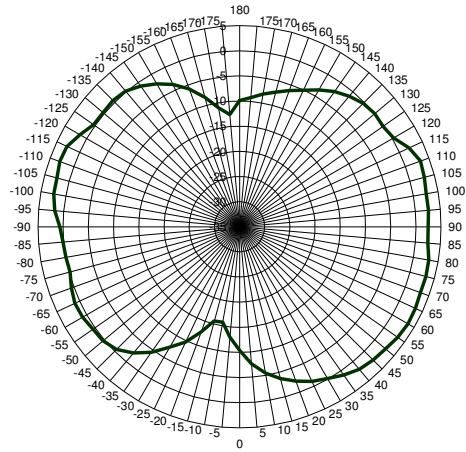

ELEV 1 -NARROW DIMENSION-ADC MOUNTED ON CORNER OF HAND HELD UNIT

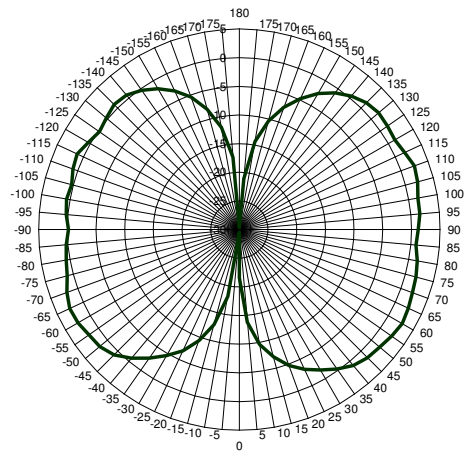

OMNI-ADC MOUNTED ON CORNER OF HANDHELD UNIT

